


IDEAL PW121

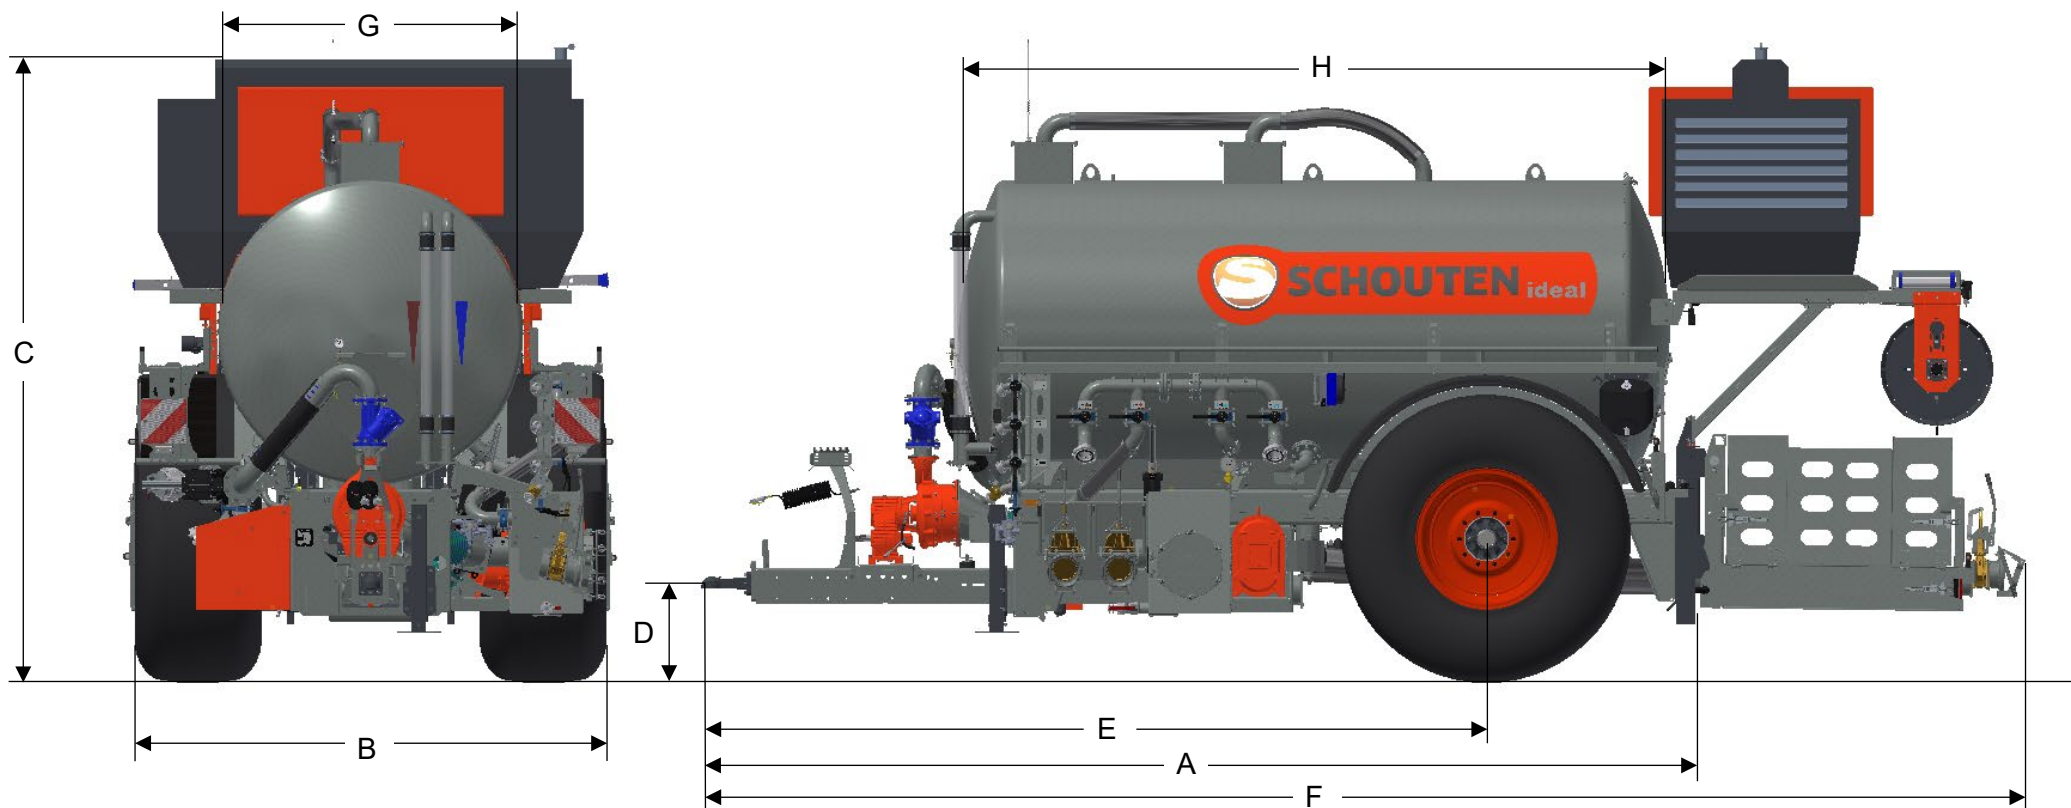

DIMENSIONS

A	LENGTH	6350 MM	E	DISTANCE HITCH – AXLE	4890 MM
B	WIDTH	2965 MM	F	LENGTH INCL. FRAME	8250 MM
C	HEIGHT	3850 MM	G	TANK DIAMETER	1900 MM
D	HITCH HEIGHT	400-700 MM	H	TANK LENGTH	4630 MM


IDEAL PW121

MACHINE INFORMATION

TYPE	PW121
WEIGHT	6.600 KG
VOLUME SLURRY COMPARTMENT	3.300 LTR
VOLUME WATER COMPARTMENT	7.800 LTR
WATER SUPPLY CONTROL	4X BUTTERFLY VALVE DN80
AIR SUPPLY CONTROL	3X BUTTERFLY VALVE DN40
AXLE	BPW 150X150MM
CARRYING CAPACITY AXLE	10.000 KG
SUPPORT LEG	HYDR. DA

CENTRIFUGAL SLURRY PUMP	DODA AFI 35HD
CAPACITY SLURRY PUMP	5.000 L/MIN
SLURRY PUMP DRIVE	PTO 1.000 RPM
PTO SHEARBOLT PROTECTION	2.920 NM
SELECT PUMPING SLURRY/WATER	HYDR. 8" VALVES
ROTARY LOBE PUMP	VOGELSANG VX186-368Q
CAPACITY ROTARY LOBE POMP	8.600 L/MIN
DRIVE ROTARY LOBE PUMP	HYDR. STEPLESS
SELECT SLURRY/WATER SUPPLY	HYDR. 6" VALVES

OPTIONS

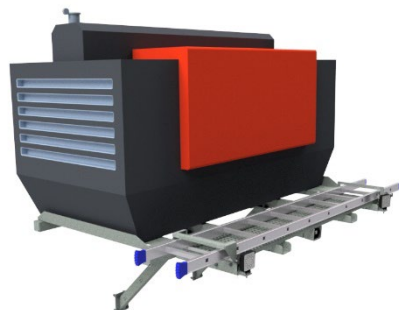

FRAME + COMPRESSOR



HOSEREEL



TOOLFRAME FOR QUAD + WATERPUMP