


SPIDER SPC1230/HS5100

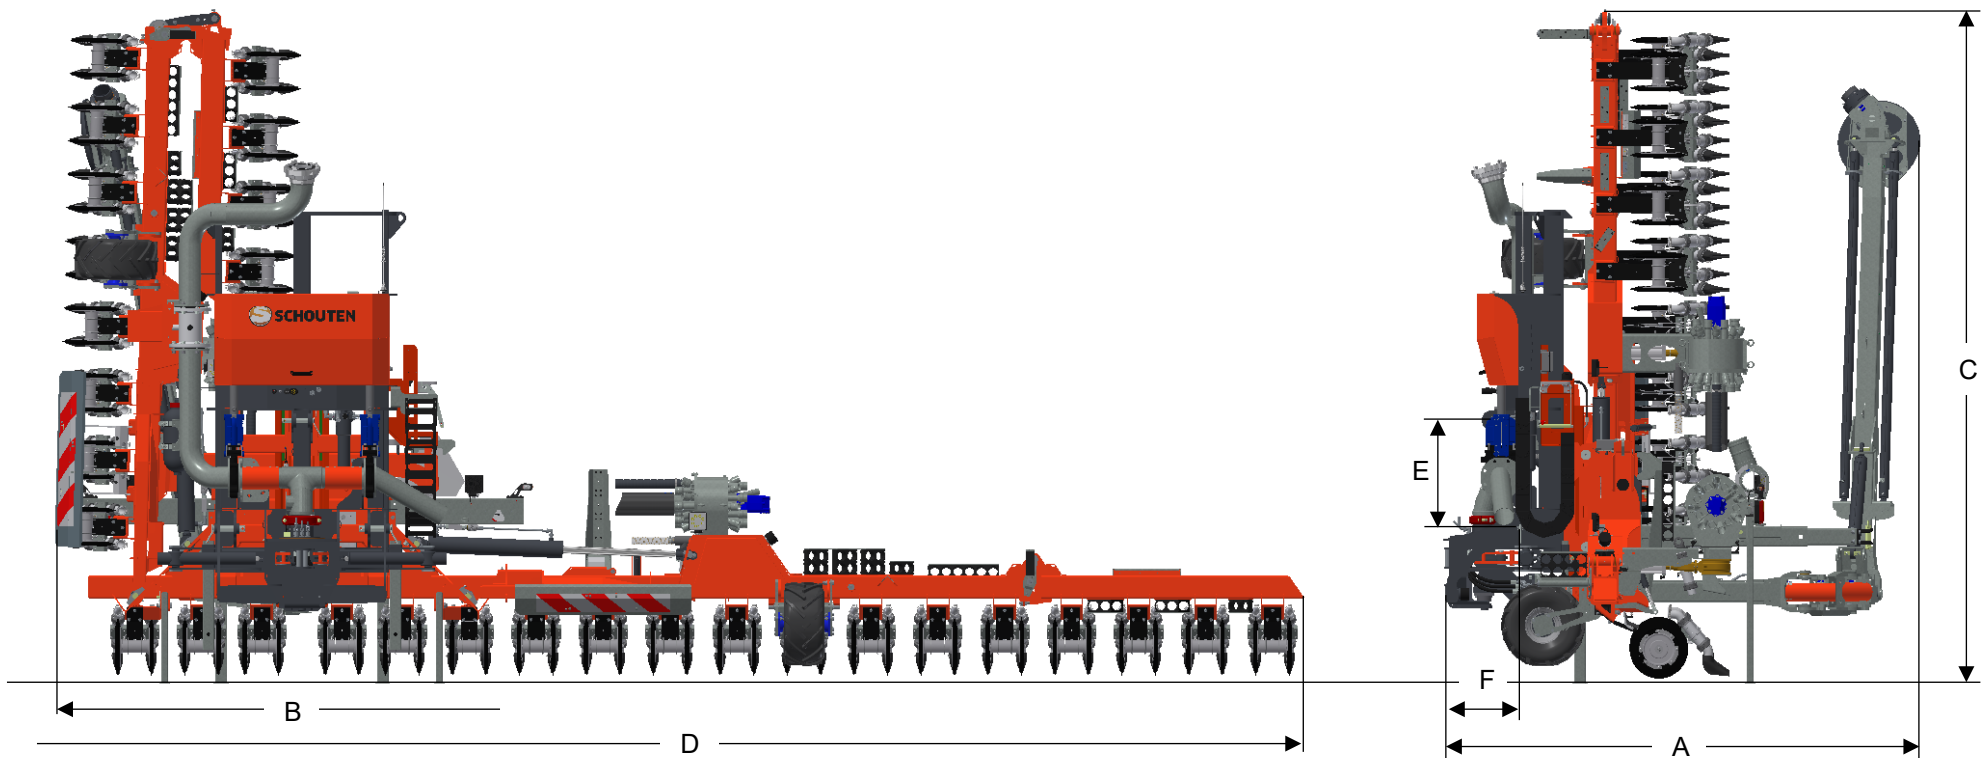

DIMENSIONS

A	LENGHT	2750 MM	E	DISTANCE LIFT PIN – LINK PIN	640/775 MM
B	TRANSPORT WIDTH	2950 MM	F	DISTANCE LIFT PIN – TWIST ELBOW	365/455 MM
C	HEIGHT	4010 MM	G		
D	WORKING WIDTH	12000 MM	H		

SPIDER SPC1230/HS5100

MACHINE INFORMATION SPC1230

TYPE	SPC1230
WORKING WIDTH	12.0 MTR
WEIGHT TRAILING SHOE	1.900 KG
WEIGHT WITH DISCS	2.200 KG
FRAME	5 DELIG INKLAPBAAR
HITCH	4 PUNTS CAT III
DISTRIBUTOR	2X EXA-CUT 30/51
SUPPORT WHEELS (OPTION)	2X 20X10.0-8

HOSE DIAMETER	Ø 51 MM
NUMBER OF COULTER	60
DIAMETER COULTER DISC	Ø 350 M
ROW DISTANCE	20 CM
FOOTVALVES	PNEUMATIC
SECTION VALVES	YES
NUMBER OF SECTIONS	5

MACHINE INFORMATION HS5100

TYPE	HS5100
WEIGHT	1.395 KG
HITCH	3 POINT CAT III
LIFT REACH HITCH	1000 MM
LIFT CAPACITY	4.000 KG

ROTATION ANGLE HOSE COUPLING	300°
RETRACTABLE LENGTH TELESCOPE TUBE	1500 MM
CENTER POSITION TELESCOPE TUBE	HYDR. AUTOM.
ELECTRICAL CONTROL	CAN-BUS COMPUTER
HYDRAULIC CONTROL	LOAD-SENSING
HYDR. POWER REQUIREMENT	100LTR / 200BAR